

Hy-Lok USA, Inc.



14211 Westfair West Dr.

Houston, TX 77041, USA

Phone: 832.634.2000 • Fax: 832-634-2099

Email: info@hylokusa.com

Q Series Female Pipe Thread Body Connector Fittings

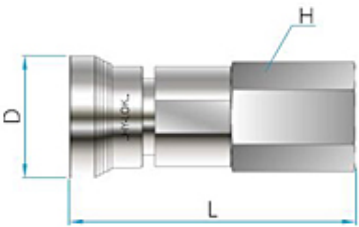

Results 1 - 8 of 8

Part Number	Length (L)	Diameter (D)	Width Across Flat (H)	Working Pressure	Temperature Rating with FKM O-Ring
Q1BF-2N	2.16 in 54.9 mm	0.91 in 23.1 mm	5/8 in 15.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1BF-4N	2.42 in 61.5 mm	0.91 in 23.1 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2BF-4N	2.54 in 64.5 mm	1.03 in 26.2 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2BF-6N	2.57 in 65.3 mm	1.03 in 26.2 mm	7/8 in 22.2 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3BF-8N	3.22 in 81.8 mm	1.21 in 30.7 mm	1 1/16 in 26.9 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1BF-4R	2.42 in 61.5 mm	0.91 in 23.1 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2BF-6R	2.57 in 65.3 mm	1.03 in 26.2 mm	7/8 in 22.2 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3BF-8R	3.22 in 81.8 mm	1.21 in 30.7 mm	1 1/16 in 26.9 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F

Results 1 - 8 of 8