

Hy-Lok USA, Inc.



14211 Westfair West Dr.

Houston, TX 77041, USA

Phone: 832.634.2000 • Fax: 832-634-2099

Email: info@hylokusa.com

Q Series Male Pipe Thread Body Connector Fittings

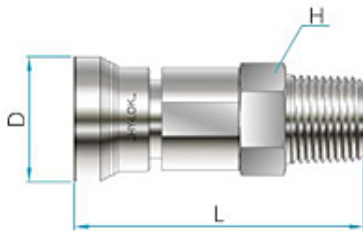

Results 1 - 8 of 8

| Part Number | Length (L) | Diameter (D) | Width Across Flat (H) | Working Pressure | Temperature Rating with FKM O-Ring |
|-------------|--------------------|--------------------|-----------------------|----------------------------------|------------------------------------|
| Q1BM-2N | 2.01 in 51.1 mm | 0.91 in 23.1 mm | 5/8 in 15.8 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q1BM-4N | 2.16 in 54.9 mm | 0.91 in 23.1 mm | 5/8 in 15.8 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q2BM-4N | 2.38 in 60.5 mm | 1.03 in 26.2 mm | 3/4 in 19.1 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q2BM-6N | 2.38 in 60.5 mm | 1.03 in 26.2 mm | 3/4 in 19.1 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q3BM-8N | 2.97 in 75.4 mm | 1.21 in 30.7 mm | 15/16 in 23.8 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q1BM-4R | 2.16 in 54.9 mm | 0.91 in 23.1 mm | 5/8 in 15.8 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q2BM-6R | 2.38 in 60.5 mm | 1.03 in 26.2 mm | 3/4 in 19.1 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |
| Q3BM-8R | 2.97 in 75.4 mm | 1.21 in 30.7 mm | 15/16 in 23.8 mm | Up to 3000 psig Up to 206 bar | -23 ~ 204 °C -10 ~ 400 °F |

Results 1 - 8 of 8