

Hy-Lok USA, Inc.


14211 Westfair West Dr.

Houston, TX 77041, USA

Phone: 832.634.2000 • Fax: 832-634-2099

Email: info@hylokusa.com

## Q Series 37 Degree Flared Tube Stem Connector Fittings

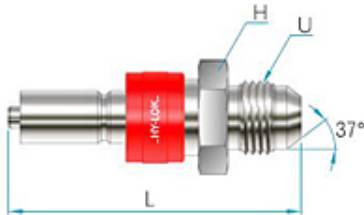

Results 1 - 6 of 6

Part Number	Unified National Fine Thread (U)	Length (L)	Width Across Flat (H)	Working Pressure	Temperature Rating with FKM O-Ring
Q1SS3F-4T	7/16"-20	2.21 in 56.1 mm	5/8 in 15.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2SS3F-6T	9/16"-18	2.31 in 58.8 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3SS3F-8T	3/4"-16	2.76 in 70.1 mm	15/16 in 23.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q1DS3F-4T	7/16"-20	2.27 in 57.7 mm	5/8 in 15.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q2DS3F-6T	9/16"-18	2.44 in 61.9 mm	3/4 in 19.1 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F
Q3DS3F-8T	3/4"-16	2.96 in 75.2 mm	15/16 in 23.8 mm	Up to 3000 psig Up to 206 bar	-23 ~ 204 °C -10 ~ 400 °F

Results 1 - 6 of 6